LEDIGAMI

Architectural Lighting Solution

LED INGROUND LIGHT INPLATI SERIES

Our INPLATI series products are compact, robust and reliable luminaires for outdoor use due to their highgrade materials being used such as stainless steel 316 for trim cover and etc. Round and square models with identical technology form the basis for flexible planning tasks.

They can be used with different illuminants and reflector and lighting technology for both illumination and light staging and for graphical presentation to guide orientation in public spaces and at intersections and to mark out paths and entrances.

The optical systems of the INPLATI series make it suitable for illuminating open spaces and surfaces as well as for marking pathways and highlighting architectural details. The LED as light source with the IP67 protection rating have a long operating lifetime. To allow for the greatest possible freedom in planning and design, there is an adjustable reflector and lampholder system. Some models in the series can be swivelled by up to 20°, so that they can be exactly positioned as required.

The optional different reflector/lens designs provide a choice of light distribution patterns.
The exact adjustment is facilitated by means of an angle scale.

LEDigami Technologies (M) Sdn. Bhd.

T : +604 655 1699
F : +604 655 2699
E : sales@ledigami-tech.com
A : Suite 137, Kompleks Eureka, USM, 11800 Gelugor Penang, Malaysia.

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 100° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-BBB-AzxgAC

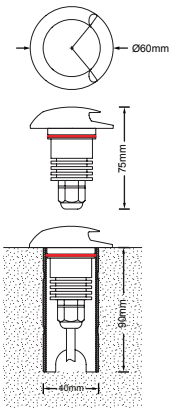

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 100° X2 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-BBB-AzxgAD

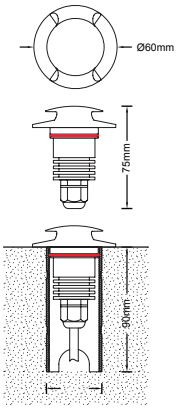

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 100° X3 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-BBB-AzxgAE

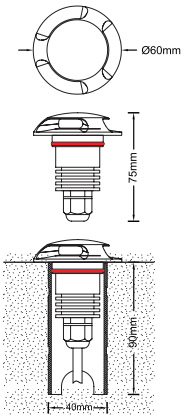

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 80° X3 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-BBB-AzxhAE

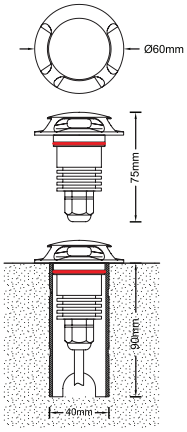

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 80° 4X BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-BBB-AzxhAF

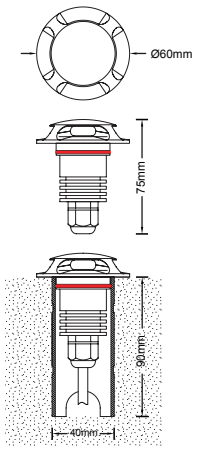

2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 20°*25° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-EJG-AzxA5AC (Ø116mm x 54mm)
DA-GA-EEG-AzxA5AC (Ø116mm x 85mm)



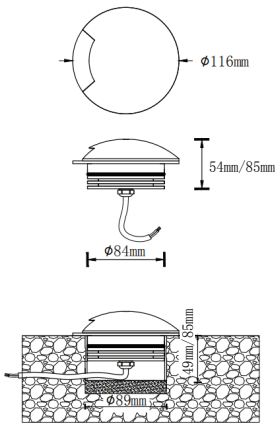

4W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 20°*25° X2 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-EJF-AzxA5AD (Ø116mm x 54mm)
DA-GA-EEF-AzxA5AD (Ø116mm x 85mm)

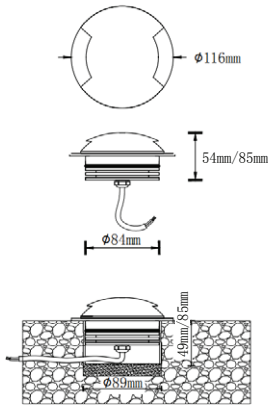

8W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 20°*25° X4 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-EJE-AzxA5AF (Ø116mm x 54mm)
DA-GA-EEE-AzxA5AF (Ø116mm x 85mm)

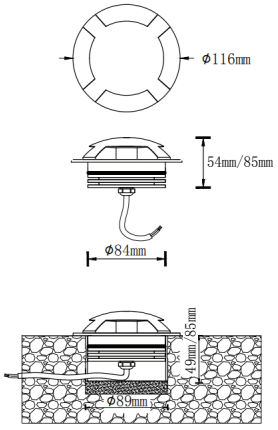

4W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 360° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-GBF-ACxjAB

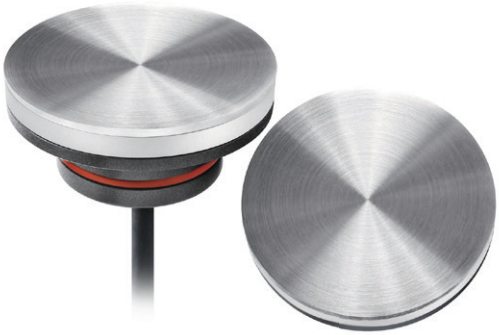

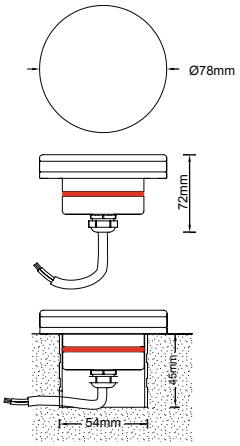

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-BGB-AzxKAG

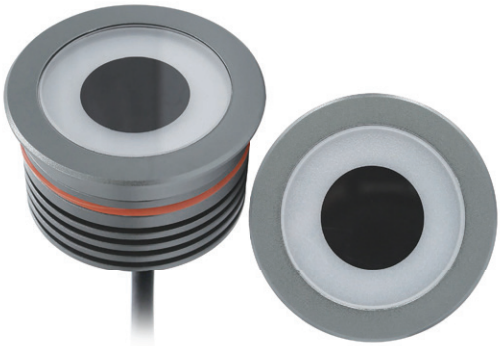

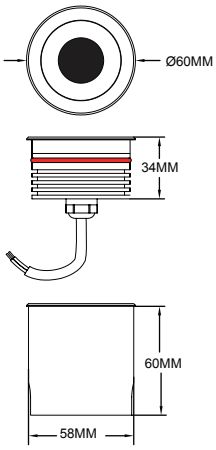

3W POWER | SMD LED LED TYPE | RGB | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM | CE RoHS Compliant COMPLIANCES

DA-HA-BGB-AzNKAG

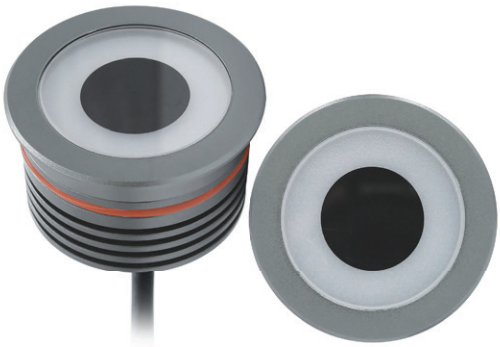

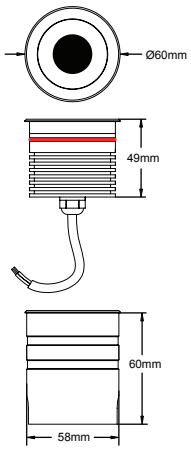

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HJB-AzxkAG

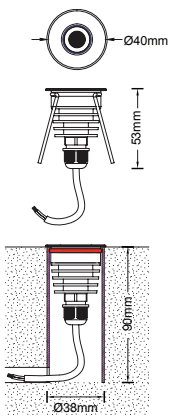

2W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK07 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-HCG-AzxkAG

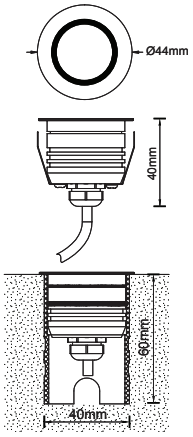

1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAH

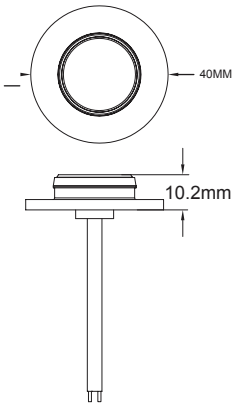

1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAJ



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAK



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAL



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAM



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAN



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAP



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAQ



1.2W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K MONO COLOR | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAR



1.2W POWER | SMD LED LED TYPE | RGB | 120° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAS



6W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzxkAT



1.2W POWER | SMD LED LED TYPE | RGB | 120° BEAM ANGLE | 12V/24V INPUT VOLTAGE | IP67 IK06 RATING | SS316/AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HKH-AzNkAH

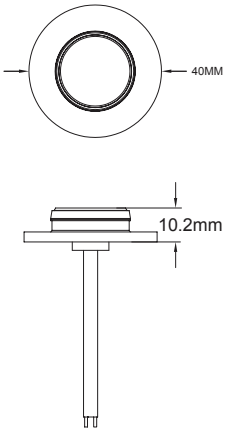

6W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316/AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-CCJ-ACxkAU

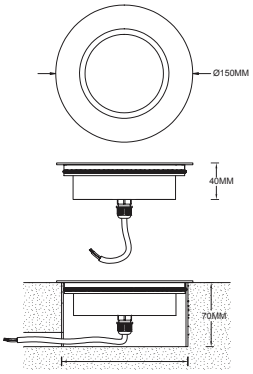

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316/AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkAH

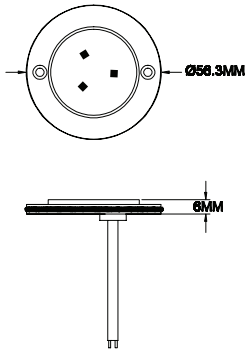

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316/AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkAU

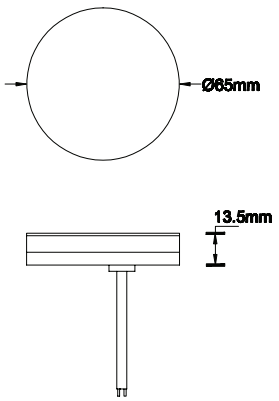

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkAV

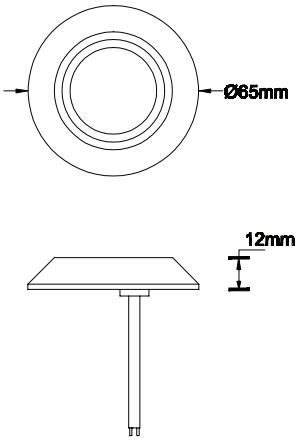

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 100° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkAW



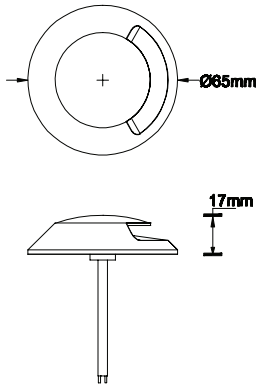

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 100° X2 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkBA

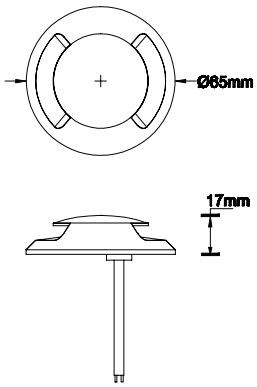

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 100° X3 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkBB

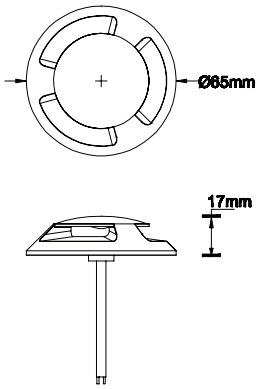

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K BLUE 6000K COLOR | 80° X4 BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-GA-JLB-ACxkBC



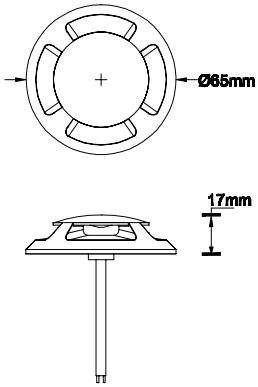

1.4W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,25°, 30°,45°, 60°, 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-KHK-AzxyAB

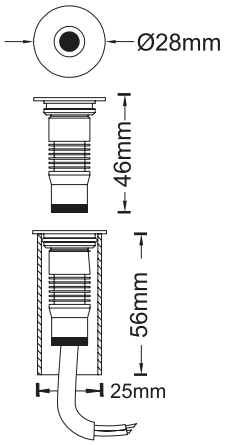

1.4W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,25°, 30°,45°, 60°, 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-KHK-AzxyBD

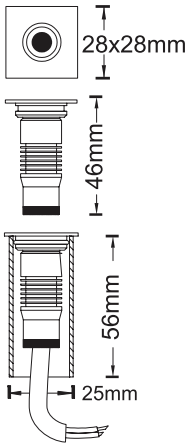

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,25°, 38°,45°, 60°, 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HJB-AzxyAB

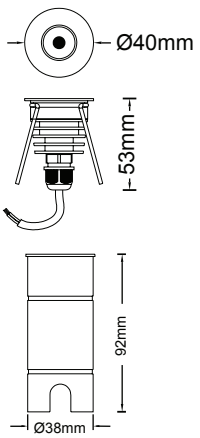

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,25°, 38°,45°, 60°, 120° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-HJB-AzxyBD

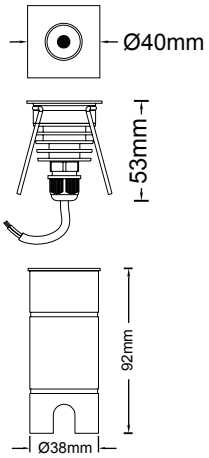

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 8°,10°,17°, 23°,28°,43°, 58°, 95° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-HDB-AzxyAB

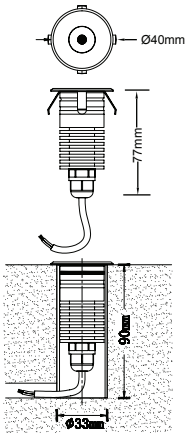

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 10°,17°, 26°,30°, 40°, 60° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-LMB-AzxyAB

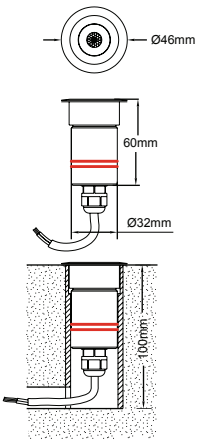

5W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-BEL-AzxyAB

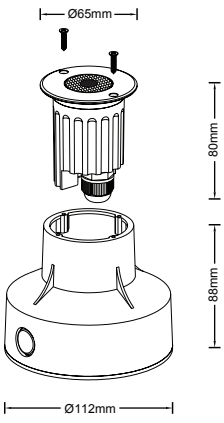

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 25°,40° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK10 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-MBB-AzxyAB

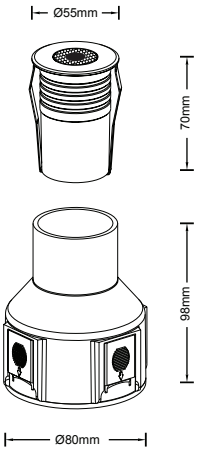

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 25°,45° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK07 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-NBB-AzxyAB

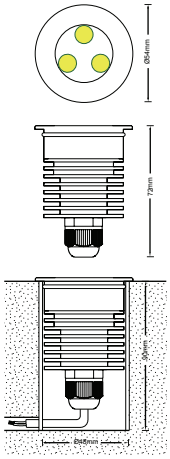

9W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-DNM-ACxyAB

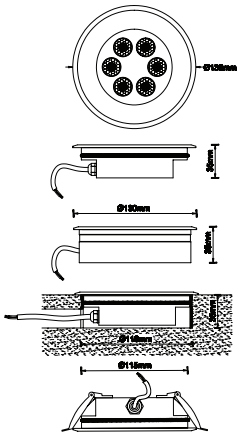

12W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-CND-ACxyAB

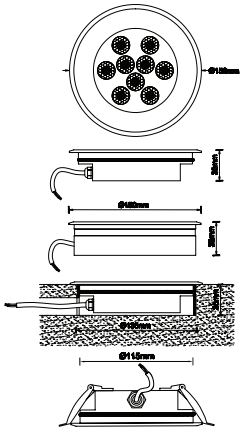

15W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-PNN-ACxyAB

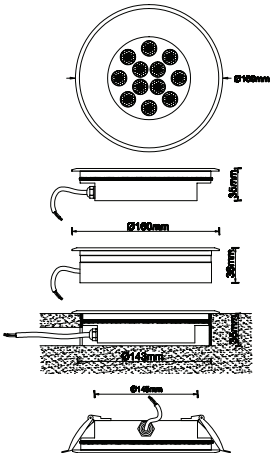

9W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 2° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-EBM-Acy5AB

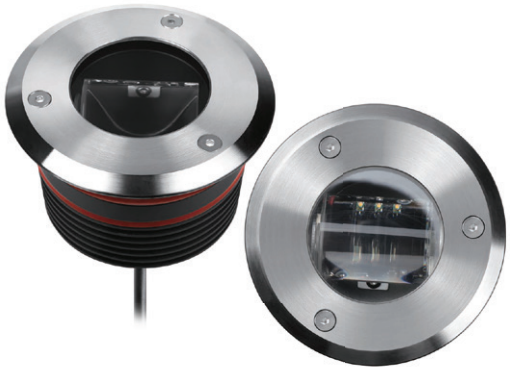

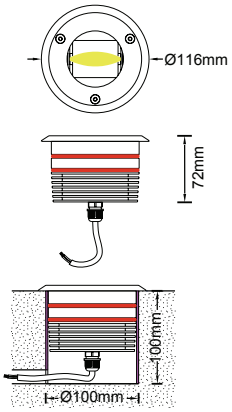

10W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 2° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-QMP-Acx5AB

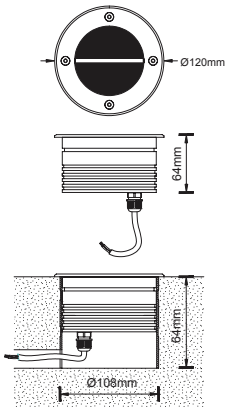

12W, 18W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K 6000K BLUE MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-DBD-AExyAB(12W) / DA-JA-DBR-AExyAB(18W)

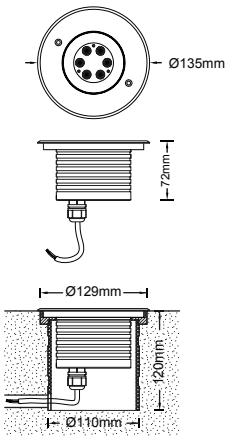

24W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-PPQ-AExyAB

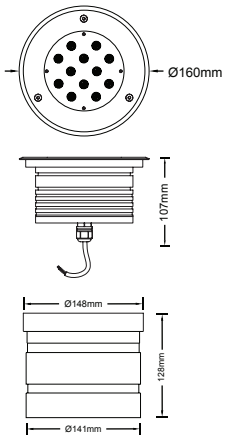

30W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,24°, 36° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-RQS-AExyAB

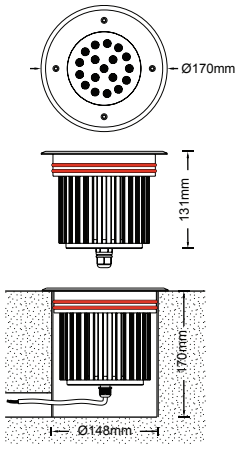

40W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°,24°, 36° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-RQT-AExyAB

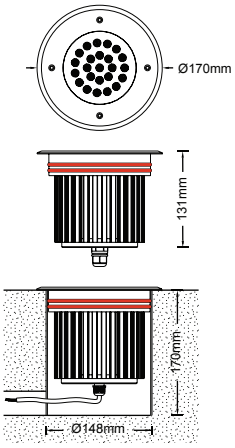

4W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 25°,40°, 60° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-EBF-ACxyAB

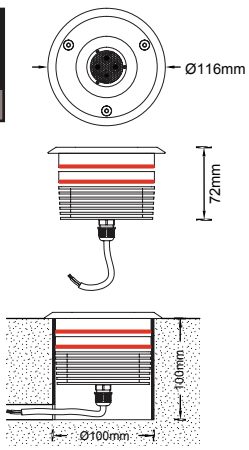

6W | POWER
SMD LED | LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE | MONO COLOR
25°,40°, 60° | BEAM ANGLE
24V | INPUT VOLTAGE
IP67 IK09 | RATING
SS316 / AL | TRIM / HOUSING
CE RoHS Compliant | COMPLIANCES

DA-JA-EBJ-ACxyAB

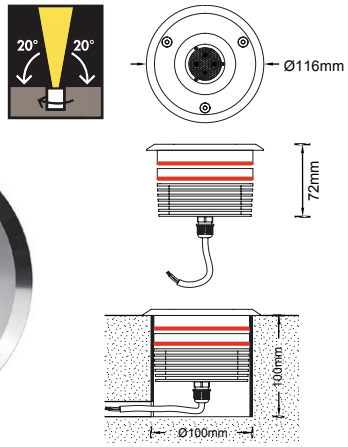

9W | POWER
SMD LED | LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE | MONO COLOR
25°,40°, 60° | BEAM ANGLE
24V | INPUT VOLTAGE
IP67 IK09 | RATING
SS316 / AL | TRIM / HOUSING
CE RoHS Compliant | COMPLIANCES

DA-JA-DBM-ACxyAB

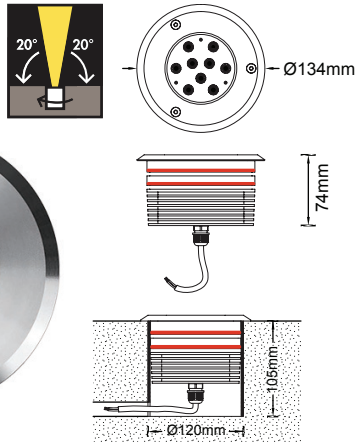

12W | POWER
SMD LED | LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE | MONO COLOR
25°,40°, 60° | BEAM ANGLE
24V | INPUT VOLTAGE
IP67 IK09 | RATING
SS316 / AL | TRIM / HOUSING
CE RoHS Compliant | COMPLIANCES

DA-JA-DBD-ACxyAB

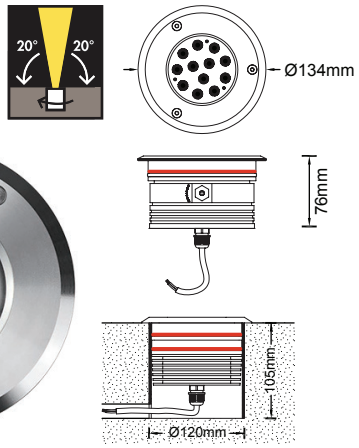

18W | POWER
SMD LED | LED TYPE
2700K 3000K 4000K 6000K | MONO COLOR
8°,10°,17°, 23°,28°, 43°, 58°,95° | BEAM ANGLE
24V | INPUT VOLTAGE
IP67 IK09 | RATING
SS316 / AL | TRIM / HOUSING
CE RoHS Compliant | COMPLIANCES

DA-JA-SRR-ACxyAB

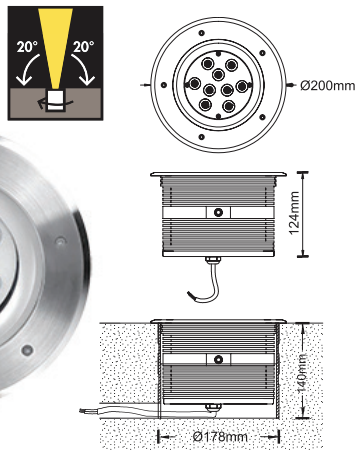

6W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 25°,36° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-EBJ-ACxyBE



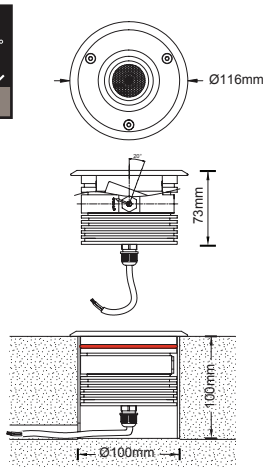

12W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 25°,38°, 60° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-DDD-ACxyBE



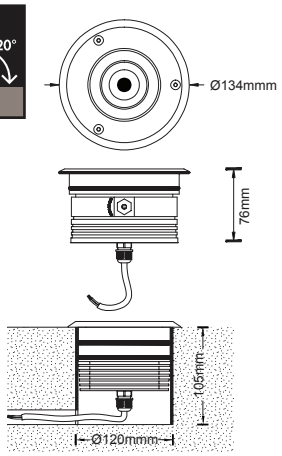

GU10 BULB BASE | IP67 IK07 RATING | 100 - 245V INPUT VOLTAGE | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-FSA-ACAABF

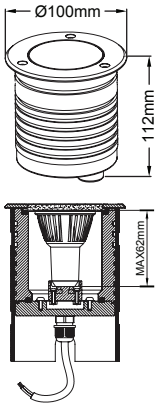

GU10 BULB BASE | IP67 IK07 RATING | 100 - 245V INPUT VOLTAGE | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-TEA-ACAABF

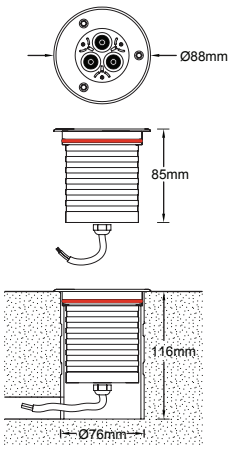

GU10 BULB BASE
IP67 IK07 RATING
100 - 245V INPUT VOLTAGE
SS316 / AL TRIM / HOUSING
CE RoHS Compliant COMPLIANCES

DA-FA-UTA-ACAABF



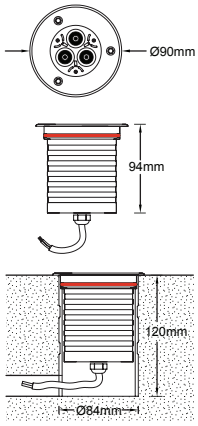

GU5.3 BULB BASE
IP67 IK07 RATING
12V INPUT VOLTAGE
SS316 / AL TRIM / HOUSING
CE RoHS Compliant COMPLIANCES

DA-FA-FUA-ADAABG

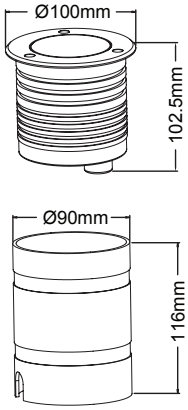

GU5.3 BULB BASE
IP67 IK07 RATING
12V INPUT VOLTAGE
SS316 / AL TRIM / HOUSING
CE RoHS Compliant COMPLIANCES

DA-FA-TEA-ADAABG

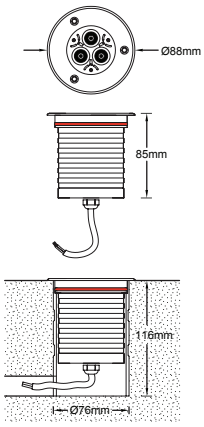

GU5.3 BULB BASE
IP67 IK07 RATING
12V INPUT VOLTAGE
SS316 / AL TRIM / HOUSING
CE RoHS Compliant COMPLIANCES

DA-FA-UTA-ACAABG



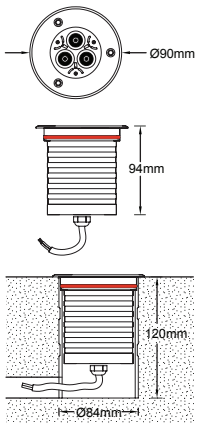

GU10 BULB BASE | IP67 IK07 RATING | 100 - 245V INPUT VOLTAGE | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-TRA-AEAABF



GU10 BULB BASE | IP67 IK07 RATING | 100 - 245V INPUT VOLTAGE | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-TUA-AEAABF

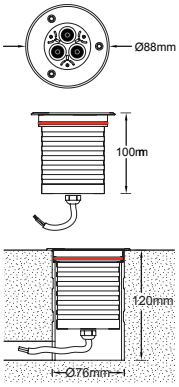

6W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 25°,36° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-BVJ-ACxyBE

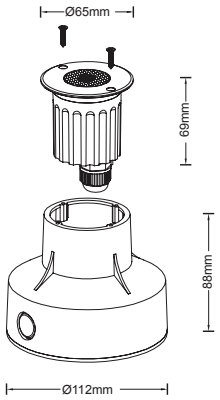

6W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 24°,36° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-BVJ-ACxyBH

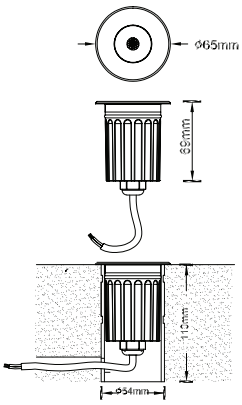

6W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 24°,36° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-BEJ-AzxyBH

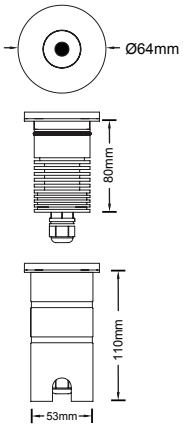

9W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 10°,23°, 38° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-GBM-AzxyBH

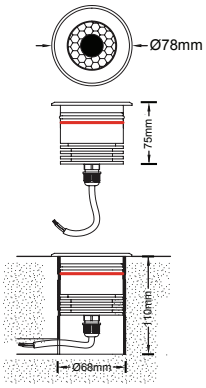

12W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°,23°, 38°,45°, 60° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-VRD-AzxyBH

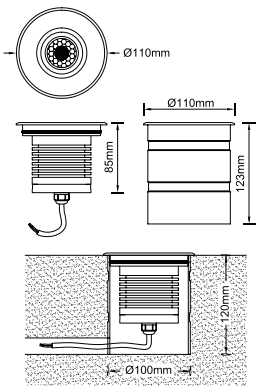

15W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°,23°, 38°,45°, 60° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-VRN-AExyBH

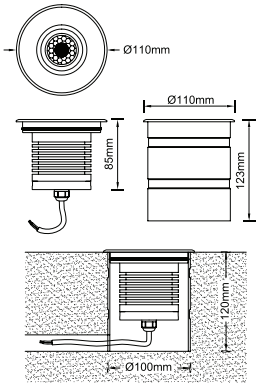

25W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°,23°, 38°,45°, 60° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-DPU-AExyBE

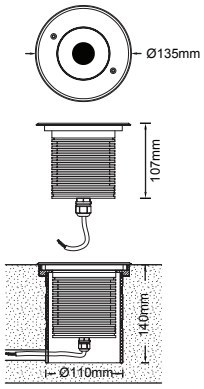

36W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°,24°, 38°,60° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-RQV-AExyBE

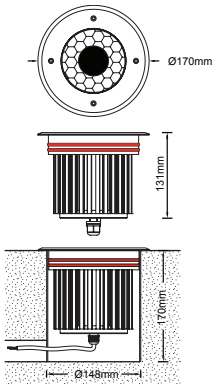

50W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 24°,60° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-WWW-AExyBH

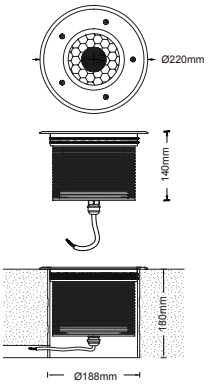

5W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 12°,34°, 48° BEAM ANGLE | 12V / 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-BML-AzxyBD

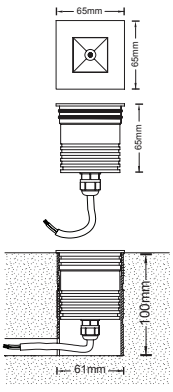

9W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 10°, 20°, 30° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-DNM-ACxyBH

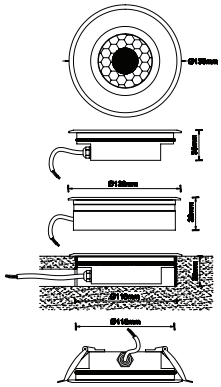

12W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 10°, 20°, 30° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-CND-ACxyBH

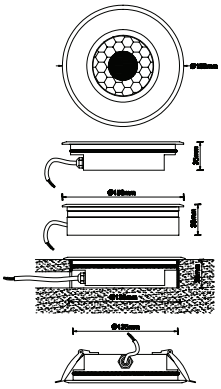

15W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 10°, 20°, 30° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-PNN-ACxyBH

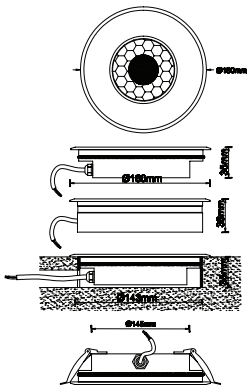

3W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-MBB-AzxyBH



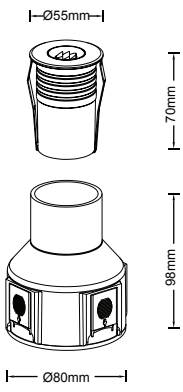

5W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-BEL-ACxyBE

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

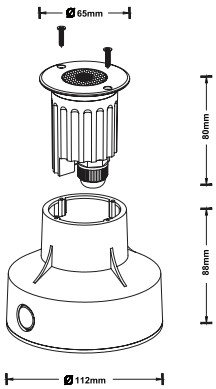

9W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-DNM-ACxyAB

Illustration of downward asymmetrical light


Illustration of upward asymmetrical light

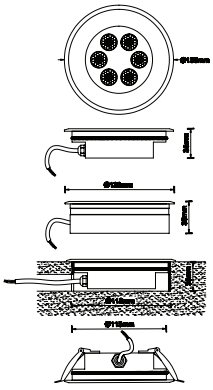

12W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-CND-ACxyAB

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

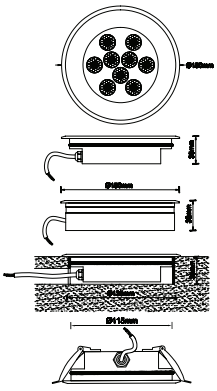

15W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-PNN-ACxyAB

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

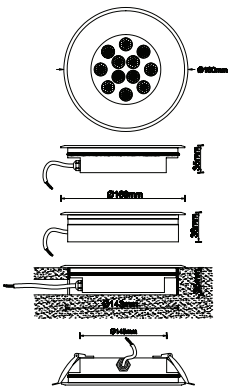

30W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-SUS-AExyAB

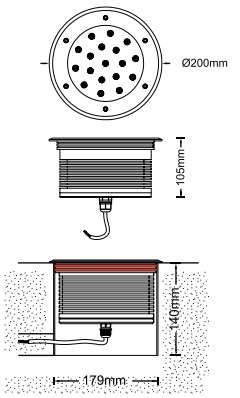

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

40W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-SUT-AExyAB

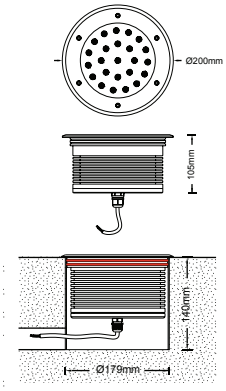

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

15W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°X70° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-FSN-AExEBE

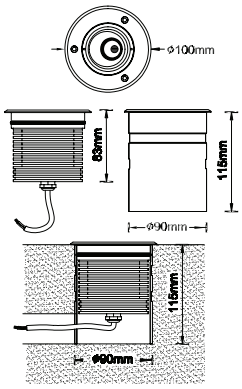

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

25W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°X70° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA- DPU-AExEBE

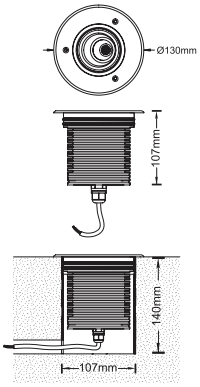

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

36W POWER | COB LED LED TYPE
2700K 3000K 4000K 6000K MONO COLOR | 15°X70° BEAM ANGLE
24V INPUT VOLTAGE | IP67 IK09 RATING
SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA- RQV-AExEBE


Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

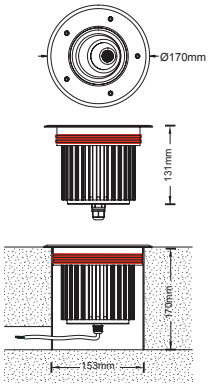

7W POWER | SMD LED LED TYPE
3000K 4000K 6000K MONO COLOR | 30° + 60° BEAM ANGLE
24V INPUT VOLTAGE | IP67 IK08 RATING
SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-GDE-AzxFA


Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

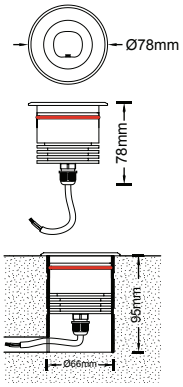

30W POWER | COB LED LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 15°+60° BEAM ANGLE
100 - 245V INPUT VOLTAGE | IP67 IK09 RATING
SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-1BS-AEx4BH


Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

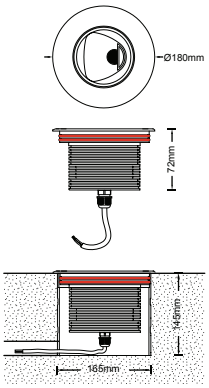

6W POWER | COB LED LED TYPE
2700K 3000K 4000K 6000K MONO COLOR | 24°,36° BEAM ANGLE
100 - 245V INPUT VOLTAGE | IP67 IK08 RATING
SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-BEJ-AzxyBJ


Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

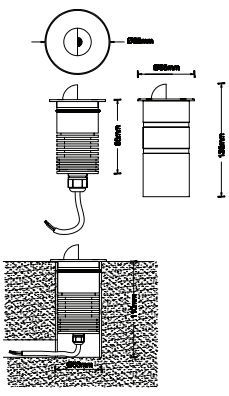

6W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 24°,36° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-BVJ-ACxyAB

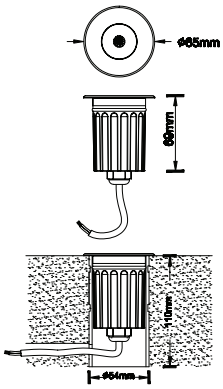

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

9W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 10°, 23°,38° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-GBM-AzxyAB

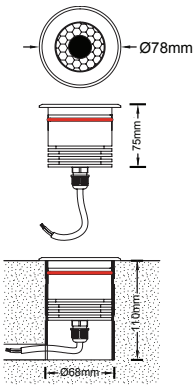

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

15W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 25°, 40°,60° BEAM ANGLE | 100 - 265V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-2EN-AExyAB

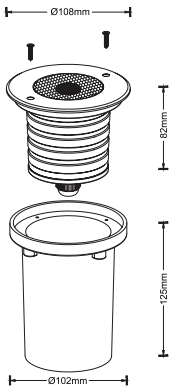

Illustration of downward asymmetrical light

Illustration of upward asymmetrical light

15W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-FWN-AExCBH

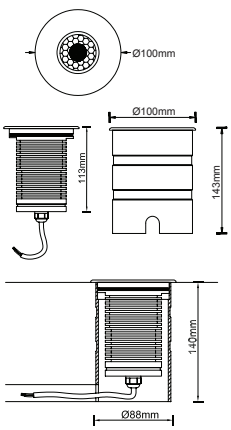

15W POWER | SMD LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 6°,8°,10°, 17°,23°,28°, 43°, 58° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-VRN-AzxyBH

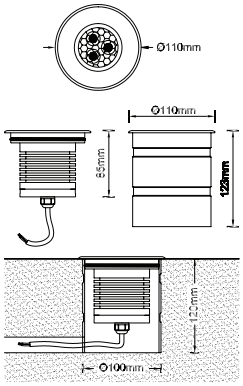

8W POWER | COB LED LED TYPE | 2700K 3000K 4000K 6000K MONO COLOR | 15°-50° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK07 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-3TE-AzxABH

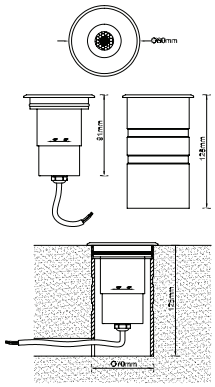

24W, 48W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 5°,8°,12°, 24°,36°,60°, 10°*30° BEAM ANGLE | 12V/ 24V INPUT VOLTAGE | IP68 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-FA-4TQ-AzxyBD(24W) / DA-FA-5Ta-AzxyBD(48W)



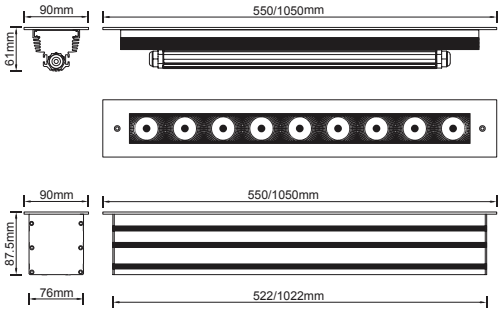

7.5W POWER | SMD LED LED TYPE | 2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE MONO COLOR | 30°+120° BEAM ANGLE | 100 - 245V INPUT VOLTAGE | IP67 IK08 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-KA-6Mb-AExWBD



12W, 24W — POWER
SMD LED — LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE — MONO COLOR
120° — BEAM ANGLE
24V — INPUT VOLTAGE
IP67 IK08 — RATING
AL — TRIM / HOUSING
CE RoHS Compliant — COMPLIANCES

DA-KA-7JQ-ACxmBD(12W) / DA-KA-8JD-ACxmBD(24W)

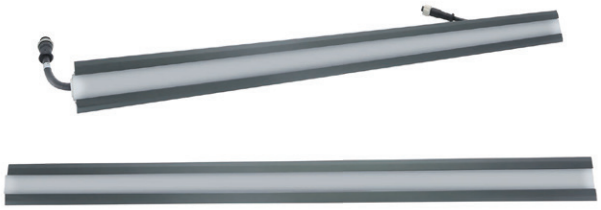

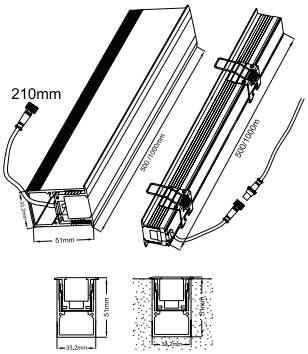

12W, 18W, 32W — POWER
SMD LED — LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE — MONO COLOR
20°+60°, 40°+60°, 15°+45°, 10°+45° — BEAM ANGLE
100 - 245V — INPUT VOLTAGE
IP67 IK08 — RATING
SS316 / AL — TRIM / HOUSING
CE RoHS Compliant — COMPLIANCES

DA-KA-9MD-AExyBD(12W) / DA-KA-8MR-AExyBD(18W) / DA-KA-7MC-AExyBD(32W)

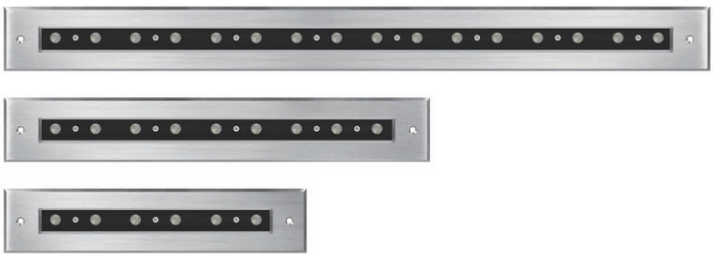

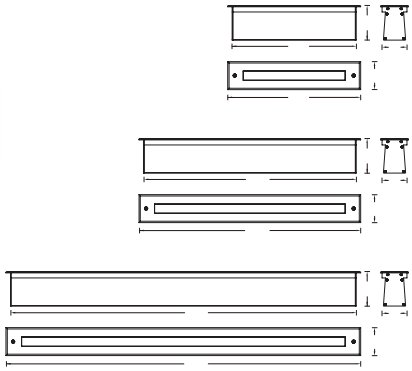

12W, 18W, 32W — POWER
SMD LED — LED TYPE
2700K RED 3000K GREEN 4000K YELLOW 6000K BLUE — MONO COLOR
120° — BEAM ANGLE
100 - 245V — INPUT VOLTAGE
IP67 IK08 — RATING
SS316 / AL — TRIM / HOUSING
CE RoHS Compliant — COMPLIANCES

DA-KA-9MD-AExmBD(12W) / DA-KA-8MR-AExmBD(18W) / DA-KA-7MC-AExmBD(32W)

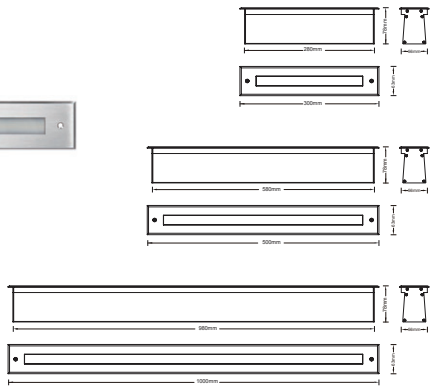

4W — POWER
SMD LED — LED TYPE
5500K — RGBW
30° — BEAM ANGLE
12V — INPUT VOLTAGE
IP67 IK06 — RATING
SS316 / AL — TRIM / HOUSING
CE RoHS Compliant — COMPLIANCES

DA-HA-HJF-ADxRAB

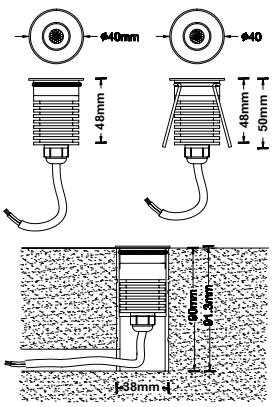

3W POWER | SMD LED LED TYPE | RGB | 20°,45°, 60° BEAM ANGLE | 12V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-HFB-ADNyAB

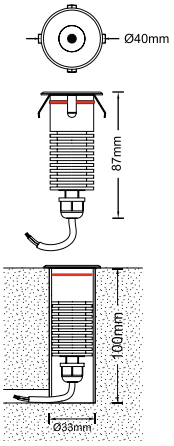

3W POWER | SMD LED LED TYPE | RGB | 25°,45° BEAM ANGLE | 12V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-MBB-ADNyAB

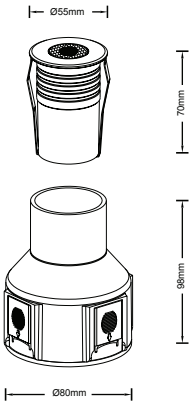

3W POWER | SMD LED LED TYPE | RGB | 25°,45° BEAM ANGLE | 12V INPUT VOLTAGE | IP67 IK06 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-HA-MBB-ADNyBH

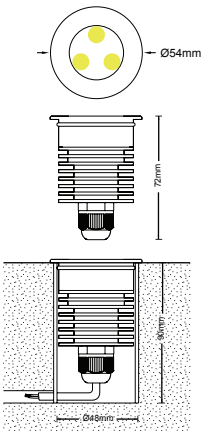

9W POWER | SMD LED LED TYPE | RGB | 25°,45° BEAM ANGLE | 12V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Compliant COMPLIANCES

DA-JA-EBM-ADNyAB



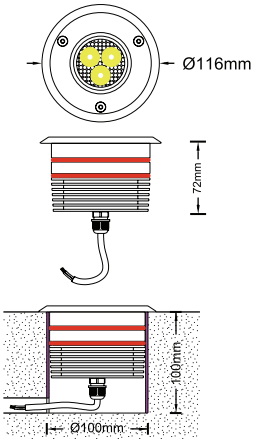

12W POWER | SMD LED LED TYPE | 6000K RGB | 25°,45° BEAM ANGLE | 12V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Constant COMPLIANCES

DA-FA-EBD-ACxyAB



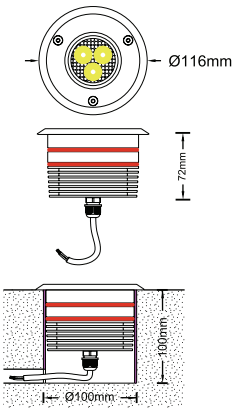

12W POWER | SMD LED LED TYPE | RGB | 20°,40°, 60° BEAM ANGLE | 24V INPUT VOLTAGE | IP67 IK09 RATING | SS316 / AL TRIM / HOUSING | CE RoHS Constant COMPLIANCES

DA-FA-DDD-ACNyAB



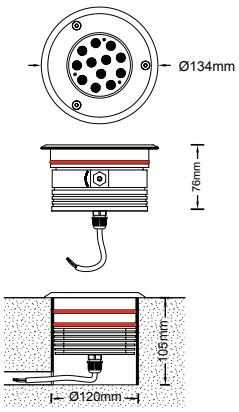

PRODUCT SPECIFICATION CODE

X : CCT

B=2700K
C=3000K
D=4000K
E=6000K
J=RED
K=GREEN
L=BLUE
M= YELLOW
N=RGB
T=RGB + 3000K
U= RGB + 5500K
S= RGB + 6000K

Y: Beam Angle

w=6°
n=8°
B=10°
C=15°
P=17°
b=20°
q=23°
Q=24°
U=25°
v=26°
r=28°
R=30°
G=36°
a=38°
P=40°
s=43°
T=45°
t=58°
S=60°
u=58°
m=120°

1=15°x25°
2=15°x30°
3=15°x45°
4=15°x60°
c=20°x60°
N=10°x45°
V=10°x30°

Z: Voltage

C=24VDC
D=12VDC
E=100-245VDC

CE RoHS Compliant

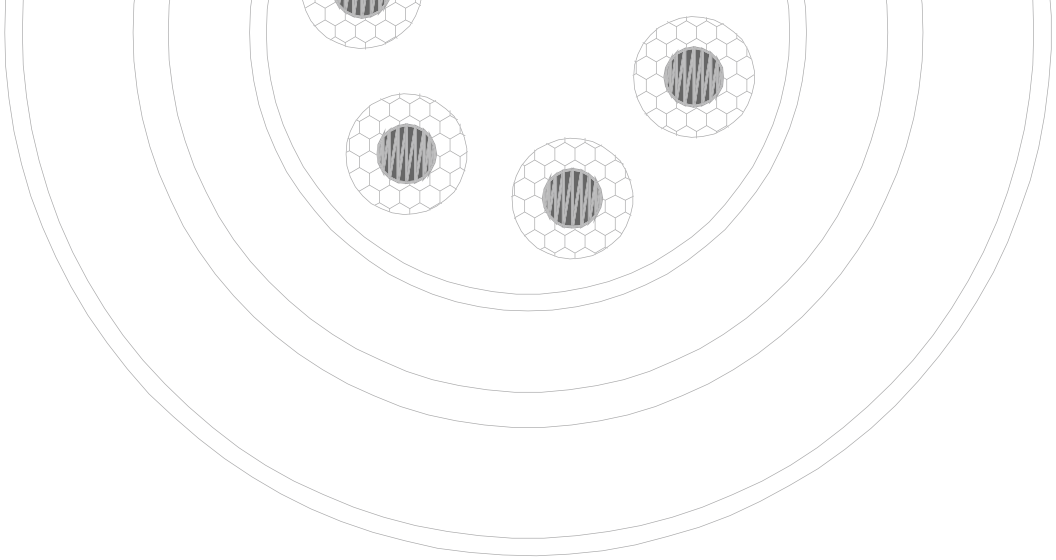

LEDIGAMI

Architectural Lighting Solution