



### Features

- 1W LED Dot Starion 1W
- Aluminium housing with plastic cover (Frosted Dome/Flat Clear)
- BA120°
- DMX512 control system to achieve gradual, transition, blinking and other dynamic effects

### Highlights

- High brightness with robust design
- Backlit for billboards, signage and advertisement light boxes
- Fully-customizable solution for creative and demanding media projects
- Flexible mounting capability for challenging surfaces
- Field installation friendly and cost effective

### Technical Specifications

Product Name		AB-DD-dA2-xANHzh	AB-DD-dA2-xANHz0
Picture/ display	LED type	SMD	
	Beam angle	120°	
	Color	RGB/2200/3000/6500K	
Environmental	Operating temperature	-20°C to +45°C	
	Operating humidity range	0% - 90% RH	
	Ingress protection	IP65	
	LED lifetime	50,000 hrs	
Power	Mains input	DC15V	
	Power consumption maximum	1W	
Physical	Housing	Aluminum	
	Cover	Plastic - Milky Dome	Plastic - Flat Clear
	Dimension	36 (dia.) x 29(H)mm	33 (dia.) x 22 (H)mm
Control	Control system	DMX512/Standard ON-OFF	

\* Options :

x: Color

1= 2200K, 3= 3000K, 4= 4000K, 6= 6500K

B= RGB


z: Control system

A= ON/OFF

F= DMX512


Technical Drawing

Unit : mm

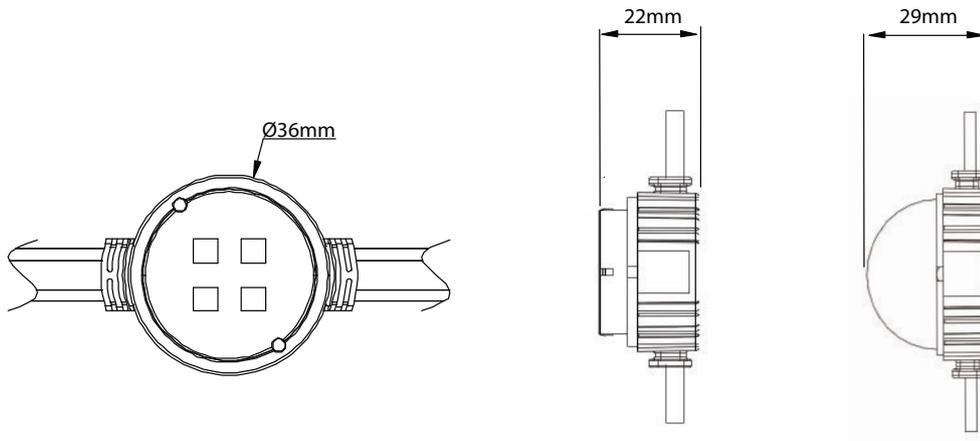

Tolerance for dimension =  $\pm 2.5\text{mm}$

Accessories - Mounting Clip

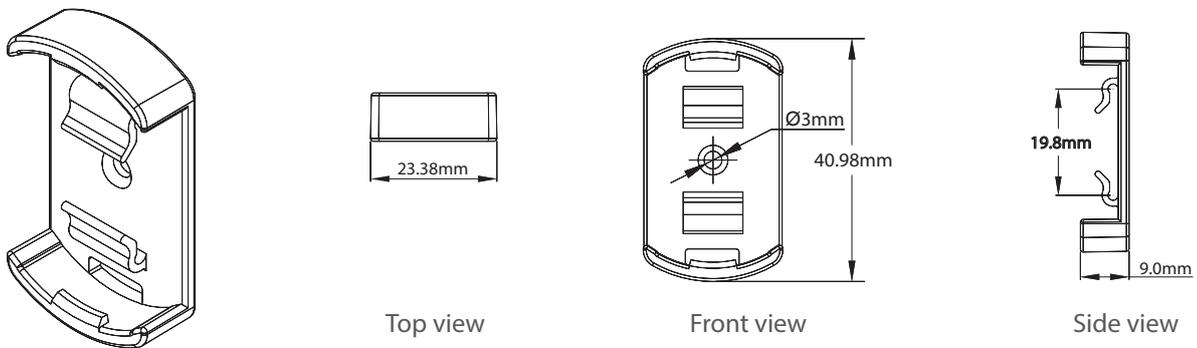

Tolerance for dimensions =  $\pm 2.5\text{mm}$

All specifications are subjected to change without notice.