




### Features

- Aluminium housing with plastic cover
- IP65 rated and UV resistant
- DMX512 control system

### Highlights

- Optional frosted dome and crystal dome cover
- Fully-customizable solution for creative and demanding media projects
- Flexible mounting capability for challenging surfaces
- Field installation friendly and cost effective

### Technical Drawing

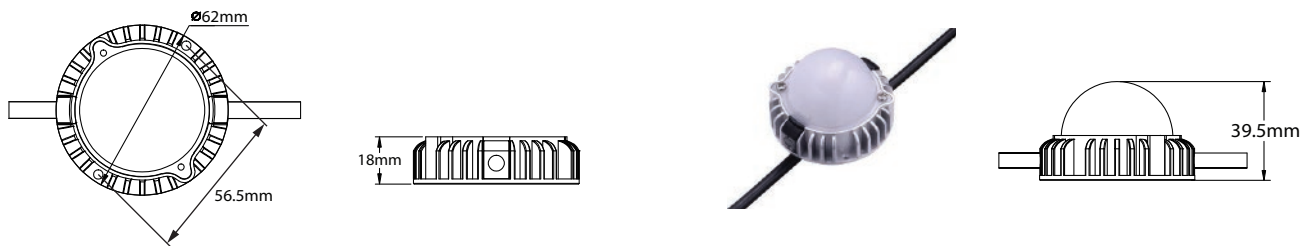

### Accessories - Dome Cover

### Technical Specifications

Article Number	AB-DD-eVB-xBNCyz*	AB-DD-eVC-xBNCyz*
<b>Optical</b>		
LED	SMD LED	
Field angle	120°	
Color	2200K/3000K/4000K/6500K/RGB/RGBW	
Color grey scale	12 Bits	
Pitch size	Customize according to requirement	
<b>Environmental</b>		
Operating temperature	-35°C - 45°C	
Operating humidity range	0 - 90% RH	
Ingress protection	IP65	
LED lifetime	50,000 HRS	
<b>Power</b>		
Mains input	24VDC	
Power consumption maximum	3W	5W
Power consumption typical	2W	4W
<b>Physical</b>		
Housing	Aluminum	
Lens	No Cover / Milky Dome / Crystal Dome	
<b>Control</b>		
Control system	ON-OFF / DMX512	

\*Option

**x:Color**  
 2=2700K, 5=5700K  
 3=3000K, 6=6500K  
 4=4000K, C=RGBW  
 B=RGB

**y: Control**  
 A=ON-OFF  
 F= DMX512

**z: Lens**  
 0=No Cover  
 h=Milky Dome  
 J=Crystal Dome