

LED DOWNLIGHT LUXURUS G2

LED DOWNLIGHT LUXURUS G2 provides control over the perfect ambience, it has a broad portfolio with CCT from 3000K, 4000K, and 6500K with the minimum of 90 CRI.

LED DOWNLIGHT LUXURUS G2 comes with round versions with 5 different dimensions to choose from. The elegant design enables applications to be installed in places like offices, shopping centers, meeting rooms and etc.



SPECIFICATIONS

- System Power : 5W, 9W, 15W, 20W & 25W
- Outer Dimensions : Φ 90mm, Φ 102mm, Φ 142mm, Φ 175mm & Φ 200mm
- CCT : 3000K, 4000K, 6500K
- CRI : 90
- Life Span: 40K Hours
- IP Rating : IP20


HIGHLIGHTS

- High reduction in power consumption
- Elegant Design
- Instant-on light
- Easy installation

CERTIFICATIONS

- CE
- RoHS

← 90mm, 102mm, 145mm, 175mm, 200mm →

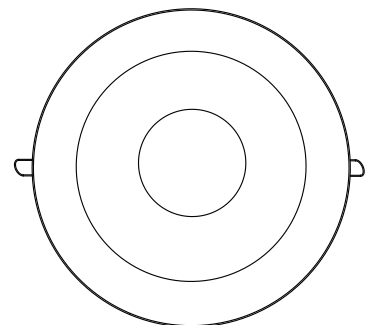

Tolerance: \pm 2.5mm

TECHNICAL SPECIFICATIONS

| SYSTEM Power | CCT | Beam Angles | Light Output | CRI | Voltage | Power Factor | Dimensions (LxWxH) | Cut-out Size | Article Number |
|--------------|-----------------|-------------|--------------|-----|----------|--------------|---------------------|--------------|------------------|
| 5W | 3000/4000/6500K | 60° | 500lm | 90 | 100-240V | >0.90 | Φ 90 x H52mm | Φ 75mm | LC-D7-IBG-PxASBz |
| 9W | 3000/4000/6500K | 60° | 900lm | 90 | 100-240V | >0.90 | Φ 102 x H60mm | Φ 90mm | LC-D7-P6T-PxASBz |
| 15W | 3000/4000/6500K | 60° | 1500lm | 90 | 100-240V | >0.90 | Φ 142 x H52mm | Φ 125mm | LC-D7-CBD-PxASBz |
| 20W | 3000/4000/6500K | 60° | 2000lm | 90 | 100-240V | >0.90 | Φ 175 x H95mm | Φ 145mm | LC-D7-fb2-PxASBz |
| 25W | 3000/4000/6500K | 60° | 2500lm | 90 | 100-240V | >0.90 | Φ 200 x H110mm | Φ 165mm | LC-D7-pgE-PxASBz |

*Option: x = CCT

H= 3000K@CRI90
I= 3000K@CRI90
a= 3000K@CRI90

z= reflector

B= Glossy Silver
F= Matt White

Note :

All measurement datas are subjected to 10% tolerance due to measurement equipment tolerance and accuracy
All product specifications are subject to change without prior notice