

LED DOWNLIGHT LUXURUS TW

LED DOWNLIGHT LUXURUS TW provides control over the perfect ambience, it has a broad portfolio with tunable CCT from 2700K to 6500K with the minimum of 80 CRI.

LED DOWNLIGHT LUXURUS TW comes with round versions with 5 different dimensions to choose from. The elegant design enables applications to be installed in places like offices, shopping centers, meeting rooms and etc.



FEATURES

- System Power : 7W, 10W, 16W, 25W & 35W
- Outer Dimensions : Φ 90mm, Φ 115mm, Φ 140mm, Φ 200 & Φ 230mm
- Tunable CCT : 2700K - 6500K
- CRI : 80
- Life Span: 50K Hours @ L80B50
- IP Rating : IP20


HIGHLIGHTS

- 0/1-10V or DALI DT8 Dimming
- Elegant Design
- Flickering Free
- Tunable White

CERTIFICATIONS

- CE
- RoHS

← 90mm, 115mm, 140mm, 200mm, 230mm →

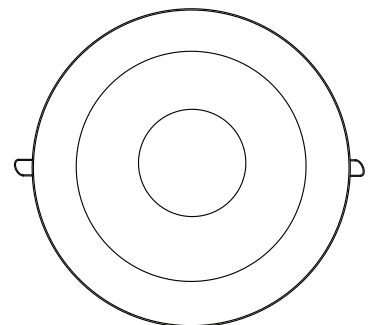

Tolerance: \pm 2.5mm

TECHNICAL SPECIFICATIONS

System Power	Tunable CCT	Beam Angles	Light Output*	CRI	LED Type	Outer Dimensions	Cut-out Size	Article Number
7W	2700-6500K	40°	600lm	80	COB	Φ 90 x H52mm	65mm	LC-DL-DAB-VdHEBF
10W	2700-6500K	40°	900lm	80	COB	Φ 115 x H65mm	90mm	LC-DL-EAC-VdHEBF
16W	2700-6500K	40°	1300lm	80	COB	Φ 140 x H76mm	115mm	LC-DL-cAa-VdHEBF
25W	2700-6500K	40°	2300lm	80	COB	Φ 200 x H108mm	160mm	LC-DL-pAE-VdHEBF
35W	2700-6500K	40°	3100lm	80	COB	Φ 230 x H120mm	195mm	LC-DL-MAF-VdHEBF

Note :

Specification of light outputs above are measured based on CCT 6500K
 All measurement datas are subjected to 10% tolerance due to measurement equipment tolerance and accuracy
 All product specifications are subject to change without prior notice