

### Features

- 6W & 12W
- Aluminium housing with & without PC cover
- Colors include 2700K, 3000K, 4000K, Red, Blue, Green, Amber, RGB & RGBW
- IP Rating of IP65
- Length of 500mm & 1000mm for selection

### Highlights

- Transparent end cap is optional
- Soft light effect, uniform color, no hot spot
- DMX512 control is optional
- Field installation friendly
- Cost effective

### Technical Specifications

Article Number		AA-AC3-LB-BCxAA0	AA-ACB-LB-BCxAA0
Product	Lumen Output	600lm*	1200lm*
	Beam angle	Wide Angle	
	Color	2700K/ 3000K/ 4000K/ Red/ Blue/ Green/ Amber/RGB/RGBW	
Environmental	Operating temperature	-35°C ~ 50°C	
	Operating humidity range	10% ~ 90%RH	
	Ingress protection	IP65	
	LED lifetime	50,000 Hours	
Power	Mains input	24VDC	
	Power consumption	6W	12W
Physical	Housing	Aluminum	
	Cover	OPAL PC	
	Dimensions (L x W x H)	500 x 35 x 43 mm	1000 x 35 x 43 mm

Options :


x = Color Temperature

- |          |           |          |
|----------|-----------|----------|
| A= 2700K | H= Red    | L= RGB   |
| B= 3000K | I= Blue   | 1= AMBER |
| C= 4000K | J= Green  | 2= RGBW  |
| E= 5700K | K= Yellow |          |

\*The lumen output data based on CCT 4000K with PC cover.  
All specifications are subjected to change without notice.

Technical Drawing

Unit : mm

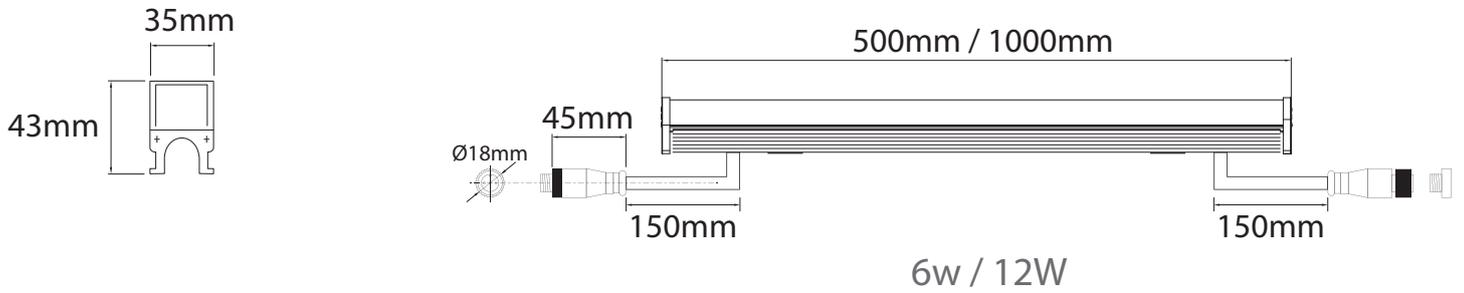

Tolerance for dimensions =  $\pm 2.5\text{mm}$

Radiation Pattern

