

## LED PANEL LIGHT 3 IN 1 LATUS DE

LED PANEL LIGHT 3 IN 1 LATUS DE adopts qualified super bright LED as light source, it combines CCT change, power change and dimming features in single product. The frame is designed to be modern and stylish, while the high quality frosted cover is used for efficient light diffusion.

This LED panel light is the ideal replacement for traditional grid lights and fluorescent tubes. It creates excellent light that conventional light will never achieve. It is suitable to be installed in hospital, offices, schools and warehouses.



### FEATURES

- Power :20/25/30/35W & 35/40/45/50W
- Beam Angles : 120°
- CCT : 3000K/3500K/4000K/5700K
- CRI : 80
- IP Rating : IP40


### HIGHLIGHTS

- 4 power adjustable steps
- 4 CCT adjustable steps
- 0-10V Dimming
- UGR <19 version is available upon request
- Easy and various installation styles



### CERTIFICATIONS

- CE
- RoHS

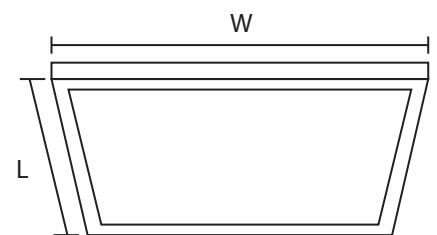

### TECHNICAL SPECIFICATIONS

Power	CCT	Beam Angle	Light Output	Optics	CRI	Dimmable	Dimensions (L x W x T mm)	Voltage	Art-No.
20/25/30/35W	3000K/3500K/4000K/5700K	120°	2200-3850lm	FROST	80	YES	595 x 595 x 30	220-240V	LC-PF-NKF-ScAeBF
20/25/30/35W	3000K/3500K/4000K/5700K	120°	2200-3850lm	FROST	80	YES	295 x 1195 x 30	220-240V	LC-PF-RLF-ScAeBF
35/40/45/50W	3000K/3500K/4000K/5700K	120°	3850-5500lm	FROST	80	YES	595 x 1195 x 30	220-240V	LC-PF-NL1-ScAeBF

\* Instant light up < 1 second.

\* Light output data above are based on CCT 5700K

\* All measurement data subjected to 10% tolerance due to measurement equipment tolerance and accuracy.

\* Lumen maintenance factor : L80

\*\* Product specification subjects to change without prior notice.