


### Features

- System power : 15W
- 1 meter in length with aluminium housing
- Mono colors, RGB & RGBW color with oval beam angles
- DMX512 control system to achieve gradual, transition, blinking and other dynamic effects

### Highlights

- High brightness with slim design
- Flexible base for angle adjustment
- Field installation friendly
- Cost effective

### Technical Drawing

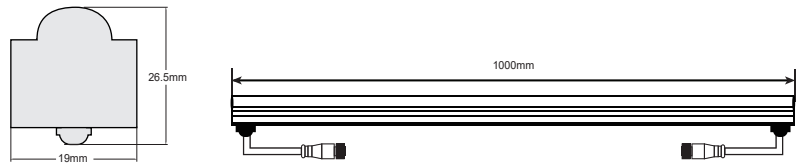

Tolerance: ±2.5mm

### Technical Specifications

Article Number		AA-BSJ-WE-BCyAS1	AA-BSJ-WE-BAyAr1
Product	LED type	SMD LED	SMD LED
	(Oval)	25° x 80°	15° x 70°
	Color	2700K / 3000K / 4000K / 5700K / 6500K	RGB / RGBW
Environmental	Operating temperature	-25°C - 45°C	-25°C - 45°C
	Operating humidity range	10 - 90% RH	10 - 90% RH
	Ingress protection	IP65	IP65
	LED lifetime	50,000hrs	50,000hrs
	Power	Mains input	24VDC
	Power consumption maximum	15W	15W
Physical	Housing	Aluminium	Aluminium
	Lens	Plastic	Plastic
	Dimensions (L x W x H)	1000mm x 19mm x 26.5mm	1000mm x 19mm x 26.5mm
Control	Control system	Standard	DMX512

\* Options :

y : Color

A= 2700K, B= 3000K, C= 4000K, D= 5700K, G=6500K

N= RGB, 2=RGBW