




### Features

- System power : 18W & 36W
- 500mm & 1000 mm in length with aluminium housing
- Mono colors, RGB & RGBW color with round & oval beam angles
- IP 65

### Highlights

- High brightness with slim design
- Flexible base for angle adjustment
- Anti-glare shield cover is optional
- DMX512 control is optional

### Technical Drawing

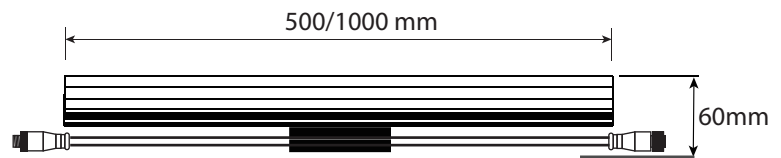

Tolerance: ±2.5mm

### Technical Specifications

Article Number	AB-WB-cRJ-xByCzC	AB-WB-cSV-xByCzC
Product	Lumen Output 1000lm	2000lm
	Beam Angle 10° / 15° / 24° / 30° / 45° / 10° x 60° / 30° x 60°	
	Color 2700K / 3000K / 4000K / 5700K / 6500K / RGB / RGBW	
Environmental	Operating temperature -25°C - 45°C	
	Operating humidity range 10 - 90% RH	
	Ingress protection IP65	
	LED lifetime 50,000hrs	
Power	Mains input 24VDC	
	Power consumption maximum 18W	36W
Physical	Housing Aluminium	
	Lens Tempered Glass	
	Dimensions (L x W x H) 500mm x 40mm x 60mm	1000mm x 40mm x 60mm
Control	Control system Standard ON-OFF / DMX512	

\*Option

<b>x: Color</b>	<b>y: Beam angle</b>	<b>z: Control</b>
2=2700K, 5=5700K	B=10°, L=45°	A= ON/OFF
3=3000K, 6=6500K	C=15°, J=60°	F= DMX512
4=4000K, C=RGBW	D=24°, Q=10°x60°	
B=RGB	F=30°, S=30°x60°	