


Highlights

- High brightness with robust design
- Excellent heat dissipation
- Flexible base for angle adjustment
- Field installation friendly
- Cost effective

Technical Drawing

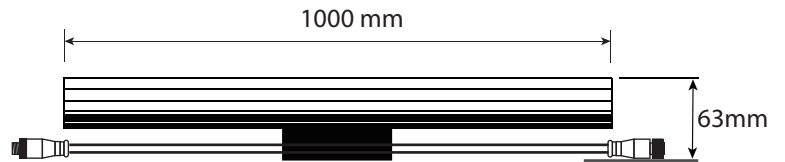

Tolerance: ±2.5mm

Technical Specifications

Article Number		AB-ACZ-WT-BA _y BE0*	AB-AC3-WT-BA _y BE0*
Product	LED type	SMD LED	SMD LED
	Beam angle	10° x 60°	10° x 60°
	Color	2700K/4000K/5700K/RGB/RGBW	2700K/4000K/5700K/RGB/RGBW
Environmental	Operating temperature	-25°C- 45°C	-25°C- 45°C
	Operating humidity range	10~90% RH	10~90% RH
	Ingress protection	IP66	IP66
	LED lifetime	50,000hrs	50,000hrs
	Power	Mains input	24 VDC
Power	Power consumption maximum	60W	75W
	Control System	DMX512	DMX512
	Physical	Housing	Aluminum
Physical	Cover	Tempered Glass	Tempered Glass
	Dimensions (L x W x H)	1000 x 50mm x 63mm	1000 x 50mm x 63mm

* Options :

y = Color Temperature

- | | | |
|------------|-----------|------------|
| A = 2700K | G = 6500K | K = Yellow |
| B = 3000 K | H = Red | N = RGB |
| C = 4000K | I = Blue | 1 = AMBER |
| E = 5700K | J = Green | 2 = RGBW |