

LED WEATHER-PROOF FITTING MARINE

The new weather proof range of light battens are an ideal solution for indoor and outdoor applications. The solid exterior and high transmittance, low glare diffuser provides great performance and light distribution for all kind of applications. It is suitable for both ceiling and wall mounting.

AREAS OF APPLICATION:

- Airport, Transit terminal
- Direct replacement for batten luminaires with fluorescent lamps
- Wide spectrum of applications
- Factory, assembly lines
- Hypermarkets
- Warehouses
- Carpark
- Clean room (Class 100 - 100K)

HIGHLIGHTS


- LED Light Source (Osram/Samsung)
- LED Life Span at 50K Hours (L80B10)
- Dimmable (0-10V & DALI) function is optional
- Instant-on light
- Easy installation and maintenance
- Complies with IEC 60598
- IP65
- Class 1

CERTIFICATIONS

- CE
- RoHS



TECHNICAL DRAWING

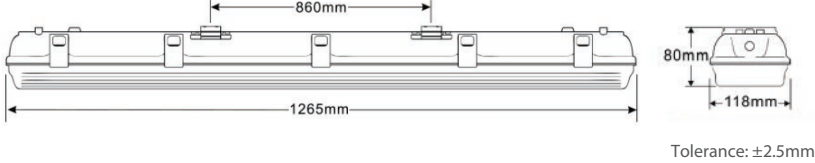

TECHNICAL SPECIFICATIONS

Power	CCT	Beam Angle	Light Output	Optics	CRI	Dimmable	Dimensions (H x W x T mm)	Voltage	Art.-No.
32W	4000K	120°	4000lm	Frosted	80	NON-DIMMABLE	1265 x 118 x 80	220-240V	HF-WA-CEG-LHAHCA
32W	6500K	120°	4000lm	Frosted	80	NON-DIMMABLE	1265 x 118 x 80	220-240V	HF-WA-CEG-LGAHCA
55W	4000K	120°	6850lm	Frosted	80	NON-DIMMABLE	1265 x 118 x 80	220-240V	HF-WA-CEV-LHAHCA
55W	6500K	120°	6850lm	Frosted	80	NON-DIMMABLE	1265 x 118 x 80	220-240V	HF-WA-CEV-LGAHCA

Note :
 All measurement datas are subjected to 10% tolerance due to measurement equipment tolerance and accuracy
 All product specifications are subject to change without prior notice