

LED PANEL LIGHT LATUS IP54

LATUS IP54 adopts qualified super bright LED as light source, it provides a commitment of stable and long lifespan of product. The frame is designed to be modern and stylish, while the high quality frosted cover is used for efficient light diffusion.

LATUS IP54 is the ideal replacement for traditional grid lights and fluorescent tubes. It creates excellent light that conventional light will never achieve. It is suitable to be installed in hospital, offices, schools and warehouses.



SPECIFICATIONS


- Power : 35W
- Beam Angles : 110°
- CCT : 3000K, 4000K & 6500K
- CRI : 80
- IP Rating : IP54

HIGHLIGHTS

- Flickering Free
- Instant-on light
- LED direct backlighting without light guide
- LED lifespan at 50k hours

CERTIFICATIONS

- CE
- RoHS

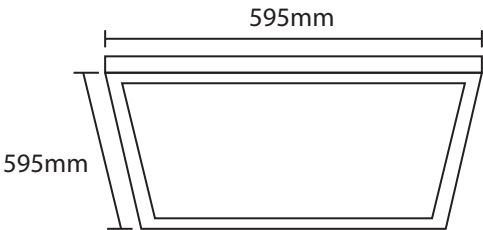

TECHNICAL SPECIFICATIONS

Power	CCT	Beam Angle	Light Output	Optics	CRI	Dimmable	Dimensions (H x W x T mm)	Voltage	Versions	Body Color	Art.-No.
35W	3000K	110°	4000lm	Frost	80	NO	595 x 595 x 30	220-240V	LED Direct Emitting	White	CF-PA-bNU-3BAFA0
35W	4000K	110°	4400lm	Frost	80	NO	595 x 595 x 30	220-240V	LED Direct Emitting	White	CF-PA-bNU-4BAFA0
35W	6500K	110°	4400lm	Frost	80	NO	595 x 595 x 30	220-240V	LED Direct Emitting	White	CF-PA-bNU-6BAFA0

* Instant light up < 1 second.

* Not suitable for accent lighting.

* All measurement data subjected to 10% tolerance due to measurement equipment tolerance and accuracy.

* Lumen maintenance factor : L80B50

** Product specification subjects to change without prior notice.