

LED FLEXIBLE STRIP FLEXION TW

LED Flexible Strip Flexion TW comes with tunable white feature, high flexibility, and easy installation. The tunable white feature allows customer to play around with color changing from 1900K up to 6500K or vice versa.



FEATURES

- Power : 10W/Meter, 18W/Meter & 20W/Meter
- Tunable CCT : 1900K-4000K & 2200K-6500k
- LED Type : SMD 2835
- CRI : 90
- IP Rating : IP20


HIGHLIGHTS

- High flexibility
- Compatible with 0/1-10V and DALI DT8 CV driver
- Tunable White
- Field installation friendly

CERTIFICATIONS

- CE
- RoHS

Top view

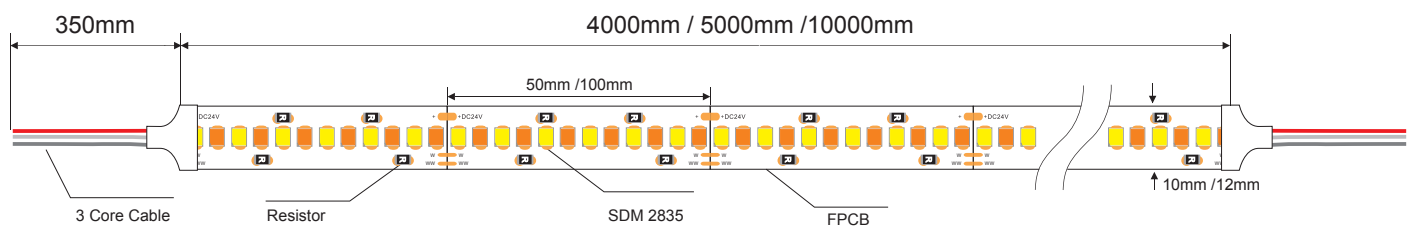

Tolerance: ±2.5mm

TECHNICAL SPECIFICATIONS

Module Power	Tunable CCT	CRI	Light Output Per Meter	Number of LED Per Meter	Cutting Length	Input Voltage	Dimension Size	Article Number
10W/M	1900 - 4000K	≥90	850 lm (4000K)	120 PCS	100 mm	24VDC	10 x 1.5 X 10000 mm	LC-FD-BgC-DfAKBA
18W/M	1900 - 4000K	≥90	1500 lm (4000K)	240 PCS	50 mm	24VDC	10 x 1.5 X 5000 mm	LC-FG-BgH-DfAKBA
24W/M	1900 - 4000K	≥90	2000 lm (4000K)	240 PCS	50 mm	24VDC	12 x 1.5 X 4000 mm	LC-FG-Bf5-DfAKBA
10W/M	2200 - 6500K	≥90	850 lm (6500K)	120 PCS	100 mm	24VDC	10 x 1.5 X 10000 mm	LC-FD-BgC-DgAKBA
18W/M	2200 - 6500K	≥90	1500 lm (6500K)	240 PCS	50 mm	24VDC	10 x 1.5 X 5000 mm	LC-FG-BgH-DgAKBA
24W/M	2200 - 6500K	≥90	2000 lm (6500K)	240 PCS	50 mm	24VDC	12 x 1.5 X 4000 mm	LC-FG-Bg5-DgAKBA

** All specifications are subjected to change without prior notice.

** This tunable white LED strip must be connected to the driver of containing CCT change function.